



# MINI-33

Inboard Engine Base Mitsubishi

3 cylinders in line 31 HP (23.1 kW) 3000 rpm




## Technical Specifications




Base	Mitsubishi
Type	Diesel 4 Stroke Cycle
Number of Cylinders	3 in line
Intake System	Atmospheric
Bore x Stroke	78 mm x 92 mm (3,07 in x 3,62 in)
Total Displacement	1318 cc
Compression Ratio	22:1
Intermittent Power (ISO3046/1)	31 HP (23,1 kW)
Continuous Power	27,9 HP (20,8 kW)
Rated RPM	3000
Combustion System	Indirect mechanical injection
Starter Motor	12 V (1,7 kW)
Alternator	120 A 12 V
Engine Max	Max static angle 12° (+ 3° in operation)
Installation Angle Direction of Rotation (Crankshaft)	Anti Clockwise
Cooling System	Sea water cooled heat exchanger
Dry Weight (bobtail)	157 Kg (346 Lbs)
Water Hose (Inside Diameter)	20 mm (0,79 in)
Fuel Feed Hose (Inside Diameter)	8 mm (0,31 in)
Fuel Return Hose (Inside Diameter)	5 mm (0,2 in)
Exhaust hose (inside Diameter)	50 mm (1,97 in)
Certifications	EU: RCD II (Directive 2013/53/EU), BSO II, SOLAS

## Dimensions

MINI-33 TMC-40P

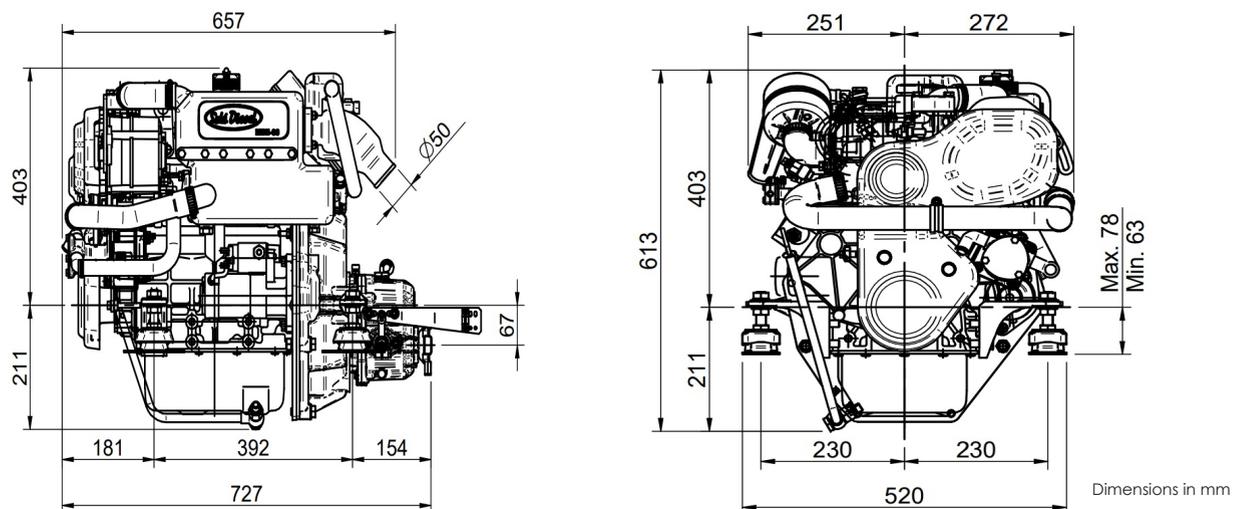

## Performance Curves

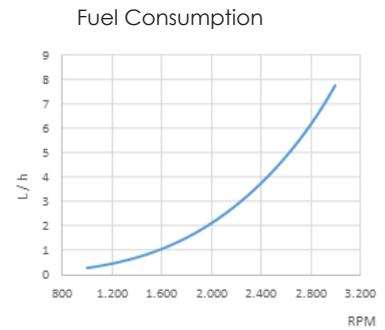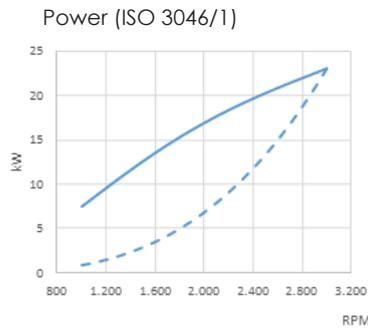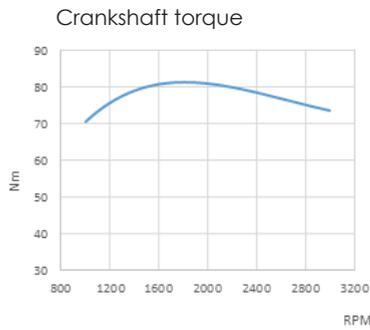

————— Engine Power    - - - - - Propeller Power

## Instrument panel

### SVT 20 Standard



- Tachometer including hour meter
- Coolant Temperature Gauge
- Pre-heating Pilot Light
- Low Battery Alarm
- High Temperature Alarm
- Low Oil Pressure Alarm
- 5 Positions Key
- Dimensions: 205 x 155 mm



### SVT 30 Optional

- Tachometer including hour meter
- Coolant Temperature Gauge
- Pre-heating Pilot Light
- Low Battery Alarm
- High Temperature Alarm
- Low Oil Pressure Alarm
- 5 Positions Key
- Oil Pressure Gauge
- Voltmeter
- Dimensions: 255 x 160 mm

## Accessories

### Scope of Supply

- Packaging
- Instrument Panel SVT 20
- Extension Harness 3 m
- Silentblocks
- Sump Drain pump
- Owner's Manual

### Optional Equipment & Kits

- We have a wide range of available accessories and kits.
- Our technical department will calculate the propeller to optimize your engine
- For additional information access our website

## Transmissions alternativ

Model	Type	Down Angle	Reduction Ratio (Light Duty)	Reduction Ratio (Conf. Duty)	Engine Weight with Gearbox
SP60	Sail Drive	0°	2.14:1	-	196 Kg (432 Lbs)
TM-345	Hydraulic	0°	2.00:1 - 2.47:1	2.00:1 - 2.47:1	183 Kg (403 Lbs)
TM-345A	Hydraulic	8°	2.47:1 - 2.00:1	2.47:1 - 2.00:1	183 Kg (403 Lbs)
TMC-260	Mechanical	0°	2.88:1	2.88:1	172 Kg (379 Lbs)
TMC-40P	Mechanical	0°	2.00:1 - 1.45:1	1.45:1	159 Kg (350 Lbs)
TMC-60A	Mechanical	7°	2:00:1 - 2.45:1	2:00:1 - 2.45:1	166 Kg (366 Lbs)
TMC-60P	Mechanical	0°	2.45:1 - 2:00:1 - 2.83:1	2.45:1 - 2:00:1 - 2.83:1	166 Kg (366 Lbs)
ZF 15 MIV	V-Drive M.	15°	2.13:1	2.13:1	173 Kg (381 Lbs)

Authorized Dealer



solediesel.com - info@solediesel.com

Detailed drawings, brochures and manuals are available on the web. © 2017, Solé Diesel. All rights reserved. Technical specifications, data and presentation are subjected to variations, changes and updates without prior notice, and without any obligation or liability whatsoever. Text and illustrations are not binding.

